

**Only** 5.6 W  
26 dB(A)



Bravo Still 100  
Bravo Still 125  
Bravo Still 150



Bravo Still  
Chrome



Bravo Still  
Platinum

#### ■ Use

- ☐ Extract fans

#### ■ Application

- ☐ Residential premises
- ☐ Flats, cottages
- ☐ Offices
- ☐ Utility spaces
- ☐ Trade premises
- ☐ Restaurants
- ☐ Health care facilities
- ☐ Child care facilities

#### ■ Features

- ☐ Wall and ceiling mounting
- ☐ Easy maintenance
- ☐ Continuous operation
- ☐ Backdraft damper
- ☐ Ball bearing motor
- ☐ Available in chrome (Bravo Still Chrome) and platinum (Bravo Still Platinum) decorations
- ☐ 5 year warranty

#### ■ Options

##### Pull-cord switch

Pull-cord switch

##### Timer


- ☐ Turn-off delay adjustable from 2 to 30 min

##### Humidity sensor

- ☐ Humidity setpoint adjustable from 60 % up to 90 %.
- ☐ Turn-off delay adjustable from 2 to 30 min


##### Motion sensor

- ☐ Detection range from 1 up to 4 m.
- ☐ Detection angle up to 100°.
- ☐ Turn-off delay adjustable from 2 to 30 min.

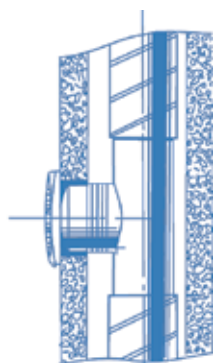


Model	Pull-cord switch	Turn-off delay timer	Humidity sensor	Motion sensor
Bravo Still 100				
100 S	●			
100 T		●		
100 ST	●	●		
100 H		●	●	
100 SH	●		●	
100 IR				○
Bravo Still 125				
125 S	●			
125 T		●		
125 ST	●	●		
125 H		●	●	
125 SH	●	●	●	
125 IR		●		○
Bravo Still 150				
150 S	●			
150 T		●		
150 ST	●	●		
150 H		●	●	
150 SH	●	●	●	
150 IR		●		○

## Overall and mounting dimensions

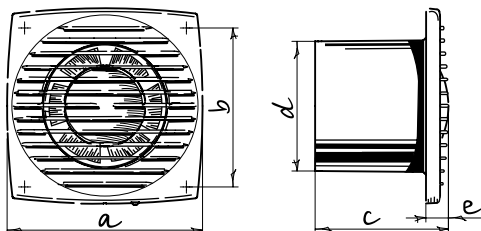

Model	Dimensions [mm]				
	a	b	c	d	e
Bravo Still 100	150	122	102	100	17
Bravo Still 125	176	144	104	125	17
Bravo Still 150	205	174	124	150	19

## Technical data

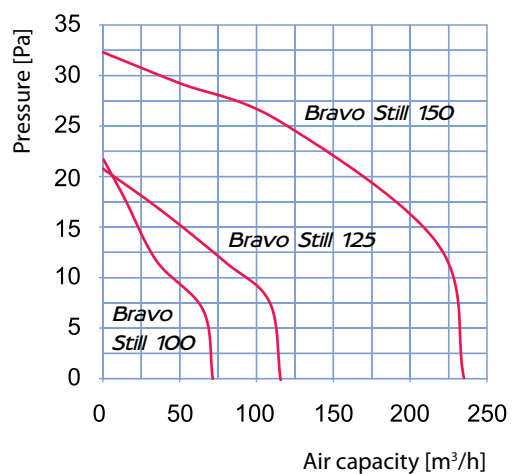

Parameters	Bravo Still 100	Bravo Still 125	Bravo Still 150
Voltage [V]	220-240	220-240	220-240
Power [W]	5.6	9.3	20
Air capacity [m³/h]	70	115	235
Sound pressure level at 3 m [dB(A)]	26	31	35



## Packing

