

WINDOW FANS



Wind-K 125

- Use**
- ☐ Window extract fans

- Application**
- ☐ Residential premises
- ☐ Flats, cottages
- ☐ Offices
- ☐ Utility spaces
- ☐ Trade premises
- ☐ Restaurants
- ☐ Health care facilities
- ☐ Child care facilities

- Features**
- ☐ Window mounting
- ☐ Low-noise impeller
- ☐ Easy maintenance
- ☐ Ball bearing motor
- ☐ 5 year warranty
- ☐ Continuous operation
- ☐ Automatic shutters
- ☐ Integrated ventilation hood with backdraft damper

■ Options

Pull-cord switch

Pull-cord switch

Timer

- ☐ Turn-off delay time regulated between 2 and 3 min.




Humidity sensor

- ☐ Regulated humidity threshold from 60 to 90 %
- ☐ Turn-off delay time regulated between 2 and 3 min.


Model	Pull-cord switch	Turn-off delay timer	Humidity sensor
Wind-K 125			
125 S	●		
125 T		●	
125 ST	●	●	
125 H		●	●
125 SH	●	●	●



External ventilation hood

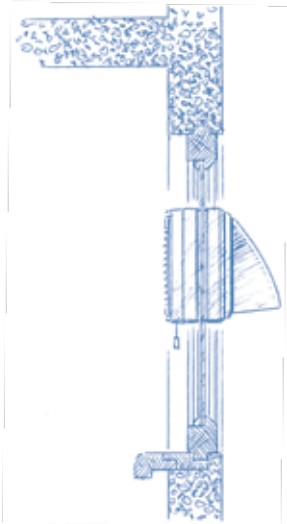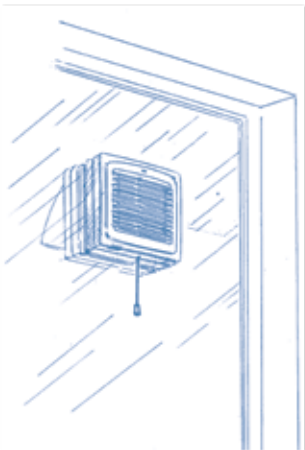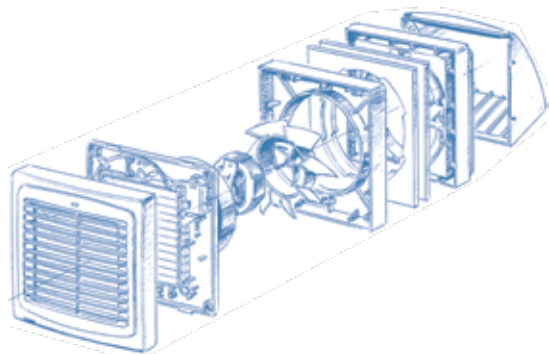


Overall and mounting dimensions

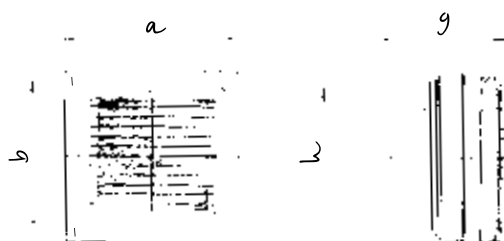

Model	Dimensions [mm]			
	a	b	g	h
Wind-K 125	186	173	183	160

Technical data

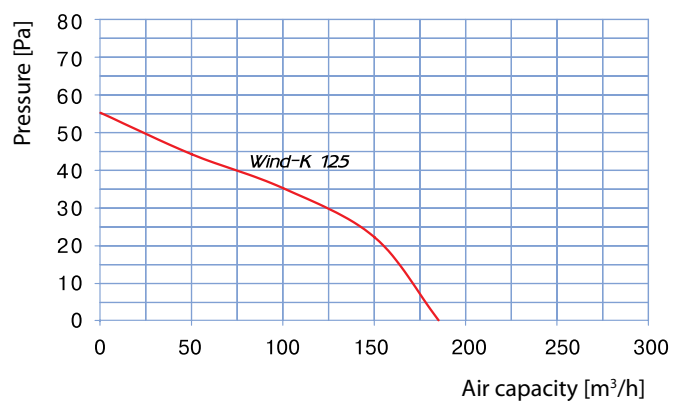

Parameters	Wind-K 125
Voltage [V]	220-240
Power [W]	22
Air capacity [m³/h]	185
Sound pressure level at 3 m [dB(A)]	35
RPM [min ⁻¹]	2400



Packing

